



**Top quality food Processing, Smoking & Cooking Equipment. Smokehouse ovens / Cookers
Vienna Peelers / Russian Separators / Smoke Generators / Trolleys / Trays / Cooking Pots**



2025 Catalogue

Deli Smoker

100 Kg Per Batch – Product dependent



Turbo 125

125 Kg Per Batch – Product dependent



Turbo 250

200 – 350 Kg Per Batch – Product dependent



Turbo 500

350 – 500 Kg Per Batch– Product dependent



Turbo 750

700 – 800 Kg Per Batch– Product dependent



Turbo 1000

800 – 1200 Kg Per Batch – Product dependent



Turbo 1500

1500 – 1700 Kg Per Batch – Product dependent



Turbo 1000 Crossflow

800 – 1200 Kg Per Batch – Product dependent



CONSTRUCTION

Stainless Steel Frame finished off in a Glass Bead Blast
"U" Channel Support for Doors, Hinges & Floor



- Fully insulated walls, roof, floor and door.
 - Built-in stainless-steel ramp.
- Two heavy duty handles and hinges.
 - Inside panel hinged for easy access.
- Designed high volume airflow of stainless-steel welded construction.
- Complete automatic cleaning system utilizing the famous Dosatron mixer.
 - Four adjustable legs to raise machine off floor for cleaning.
 - Direct drive fan.
 - Internal Shower



- Hinges made from 10 mm stainless steel
- Finished off in a glass bead blast with genuine
 - Self-lubricating Vesconite bushes
- Exhaust Box & Fan for Smoke / Steam Extraction

Smoke Generators Available for All Types of Smoking

Woodlog Friction



Slow Smoke



Woodchip



Stirrer Woodchip



COOKING AND RECIPES

- 250GB storage space for recipes.
- All recipes and set-up procedures are password protected.
- Recipes saved by name, not as numbers.
- Twelve step recipes allowing any order.
- Gentle cooking of products with Delta T cooking.
- Gentle smoking of product with Delta T smoking.
- Traditional, friction or smoke atomization available.
- Air only function and humidity control.
- Stop cycle function to insert probe or add spices after steaming process.
- Delay cycle – use of real time clock allows for starting of machine when desired.
- Two Batch numbers are recorded. These numbers are reflected in the trend graphs.

FEATURES

- Network connectivity for remote diagnostics, upgrades and Quality control trend graphs.
- The current of all Motors is monitored via current sensors.
- The current of all elements is monitored via current sensors.
- A total of 12 probes that can be placed in the room. All these probes are selectable to perform various functions like room temperature, Product Core, Smoke temperature of smoke coming from the generator, humidity, defrosting of frozen goods electrical, panel temperature and Solid-state relay heat sink temperature.

- All inputs are Mappable, what this indicates is, in the unlikely event of an input or output being faulty we can simply set in the software a spare input or output to perform that function. This eliminates the need to replace the board.
- Reinforce floor by extending the rails on the frame to Three 100 x 50 x5 mm rails welded together next to each other. this will ensure that your trolleys will run on, with a3 MM thick plate on top of it.
- All Flaps are monitored in the open and close position, this ensure that the machine will perform correctly.
- 17" color IR touch screen panel, Water Proof and shock proof.
- Win10 IOT software
- 4 Gig memory and 250gig Sata solid state hard drive.
- Free optional client software can be installed on an existing network computer to monitor smokehouses and interrogate a history of the trend graph and recipe control. Local area network to be supplied by client.
- Up to six rooms can be controlled by one CPU.
- All future software updates are automatically made available to existing customers free of charge.
- Full PID control with auto tuning thus auto sensing for the load. (Automatically decrease power to suit the load via a solid-state relay.)
- Duty cycle now allows for monitoring of running/standing time of machine.
- Trend graphs saved automatically. These can be printed to an optional printer or across installed networks.
- Humidity controlled by means of flap controls or atomization. Steps can be switched by humidity, core, and or time, ensuring consistency throughout the year regardless of seasons or altitude.

Steam

- 1) We install one room probe per trolley
- 2) We install one PVR per trolley.
- 3) We install one electrically operated steam valve per trolley.

Pneumatics

- 1) We install a sensor on the open and close position of all the flaps.
- 2) These sensors will be monitored and alarmed.

Motors

- 1) We install a non-intrusive clamp sensor, on all motors including the exhaust motor.
- 2) This reading will ensure that the motors are running and correctly functioning.
- 3) These sensors will be monitored and alarmed.

Probe Calibrations.

An optional tester and calibrator are available, that will allow for quick and efficient testing of your probe accuracy. This won't replace the annual testing of probes with a SANS calibrated equipment

However, this tester will give you piece of mind or indicate if you have a problem.

The recommendation is that daily prior to production that a quick and efficient test be performed.



QC Software

Turbo Smoker HACCP Client Management Software

Software can be installed on a computer anywhere on your network. This software will enable you to perform the following functions. This software is a useful tool to prove that your products were in actual fact cooked properly. Probes were calibrated correctly and probe verification tests are recorded making Haccp Compliancy simple

- 1) Back up and store your trend graphs externally.
- 2) Interrogate all trend graphs.
- 3) Print the trend graphs.
- 4) Trend graphs indicate in a data format or/and trend graph.
- 5) It indicates the starting time of the product
- 6) It plots records of all probes.
- 7) It also allows for recipe changing on the smokehouse.
- 8) It also allows for alarm interrogation.
- 9) It also proves for the operators ran the proper procedure and did not circumvent the procedure by advancing the recipes unnecessary. It logs all keystrokes.
- 10) Interogation of probe calibration tests performed on the Smokehouse.
- 11) Print proof of probe calibration tests.
- 12) Probe checks used with our probe calibration tester, makes testing , verification and calibration very simple.

Room 1 Turbo 500 - Probe Temperature Validation

Customer Name

02/08/2025 11:02:29

This is an automated report directly from the Smokehouse. All probe tests were performed with a Sans certified test equipment and recorded into a data table that cannot be edited.

Date	Room	Description	Raw	30Cal	60Cal	90cal	Validated	Ref	Certificate
30/06/2025	Room 3	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 3	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 3	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 1	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 3	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 3	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 3	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 3	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 1	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 2	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 2	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 2	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 1	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 3	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 2	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 1	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 1	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 3	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 3	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 3	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 1	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 3	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 2	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/06/2025	Room 2	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/07/2025	Room 1	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/07/2025	Room 1	Core 2	464	5.733333	5.366667	5.166667	89.9°	90°	Sans 123456789
30/07/2025	Room 3	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/07/2025	Room 3	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/07/2025	Room 3	Core 2	464	5.733333	5.366667	5.166667	89.9°	90°	Sans 123456789
30/07/2025	Room 2	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/07/2025	Room 3	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/07/2025	Room 3	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789
30/07/2025	Room 1	Core 1	464	5.733333	5.333333	5.144444	90.2°	90°	Sans 123456789

Cleaning.

An automatic dosing system ensures the machines are cleaned properly.
These cleans are also recorded.

DETECTIONS AND PROTECTIONS

- Full diagnostic and self-test program.
- Circuit breaker trip indicator.
- Motor trip indicator. Machine will not operate if one motor trips. A read out of the problems will be given.
- When power is restored after a power failure, the room will automatically start again at the point of interruption and not restart from the beginning.
- Heat rise of room monitored to detect faulty elements etc.
- “Probe faulty” detection.
- “Probe not in product” detection.
- Auto grease lubricator- ensures automatic greasing of the cylinder

BACTERIA PROTECTION

- Rooms are constructed with a sturdy, strong, stainless-steel frame which allows for the raising of the room above the floor for cleaning and sanitization under the rooms. Competitor machines are mounted onto the floor and we have not found any of these machines with no bacteria underneath.
- The insides of the rooms are all welded construction using argon welding techniques. Competitor machines are bolted together and sealed off with rubber seals. These seals eventually leak and allow fat and protein to seep into the frames and floors.
- The very advanced automatic cleaning system was designed to clean the inaccessible areas. We have developed a special cleaner containing a degreaser, sanitizer and de-tarer which comes with a SABS certificate. The cleaning system is so easy to operate as one has only to remove large pieces of contamination off the floor and press the button marked “clean”. The machine then automatically injects chemicals, soaks and rinses the room. Pipes and ducting are also cleaned.

Daily cleaning now becomes simple, effortless and time-saving.

PRODUCT PROTECTION

- There are a series of alarms which will not allow the room to function.
 1. No water
 2. No compressed air
 3. No steam
 4. Any circuit breaker tripped
 5. Any fuse blown
 6. Any overload trips
 7. Motors not running
 8. Current of motors
 9. Current of elements
 10. Pneumatic flap position.
 11. Electricity mains problem.
 12. Motors tripped
 13. All contactors monitored whether they are operated or not when they are supposed to be
 14. All flaps monitored whether they are open or closed when they are supposed to be.
- A probe faulty alarm will not allow the room to run with a faulty probe.
- Buttons not relevant at the time are automatically disabled and greyed out

- A “core probe in product” sensor alerts the operator that the probe has not been inserted when the recipe calls for a probe in the product. This eliminates the product from being sold uncooked. If the probe is not inserted into the product, room temperature and not product temperature is detected.
- Room temperature climb is monitored. If the room temperature does not climb within the allocated time frame the room is stopped and the operator alerted.
- When power is restored after a power failure, the room will automatically start again at the point of interruption and not restart from the beginning.
- Stop cycle function: - a) to rub on spices after steaming or
b) To insert core probe, after steaming, in products where
Inserting a probe is normally difficult.
- Smoke log present sensor ensures that the operator has inserted the wood logs. or the log is completed
- Our wood logs have an HACCP certificate.
- With a twelve step, any order recipe, Delta cooking and Delta smoking is standard. Furthermore, one can cook the product to a core temperature of 72 degrees and then hold this temperature for an additional time to ensure that pasteurization has been achieved.
- Internal showers are standard to ensure quick and efficient cooling of the product.
- Hard copies will be available in the form of trend graphs which show the room and core temperatures.
Trend graphs show the product name, the cycle e.g. item cooking, the date, time and temperatures.
Simplicity of the use of our smokehouses is the most important feature. One-year guarantee including travel and labor.

Turbo Room Data Base & Controller

Hours To Service		485.03	514.98	Room 1		2.5 KG Polony	
Temp 1	80.1°	Temp 2	80.8°	Steam Cooking		Motor Speed	
Temp 3	80.5°	Temp 4	80.1°	Temp Req		RH% 0%	
Temp 5	81°	Temp 6	80°	Room 80°		Max Power	
Temp 7	80.1°	Temp 8	80.1°	Core 0°		100%	
Core 1	15.9°	Spare	0°	Wet 0°		Heating	
Spare	0°	Spare	0°			0%	
No Locks						No Alarms	
In	Out					Power OK	
No Emergency						Delay start Time	
						4:30	
						Day	
						Tuesday	
						Sunday	
						9:45 AM	
						36 S	
Step	Rise	Started	Remaining	Time Out	Cycle time	Add time	
1	11	9:24 AM	1:58	11:43	2:18	0	
Cycle Required		Cycle Remaining		Minutes	Elapsed	Batch 1	Batch 2
122		113		9	0:21	2357	2356
Motor 1	5.4 A	Motor 6	5.4 A				
Motor 2	5.6 A	Motor 7	5.0 A				
Motor 3	5.1 A	Motor 8	5.4 A				
Motor 4	5.3 A	Exhaust 1	0.0 A				
Motor 5	6.3 A	Exhaust 2	0.0 A				
Reset	Next Step	Silence	Clean	Clean Shut Down	Select	Start	Stop
Add Time	Test	Probes	Smoke	Door out	Flags		

TROLLEY'S







A variety of Tray & Smoke Stick options are available to suit your cooking needs



Smoked / Cooked Product



INDUSTRIAL COOKING POTS & BASKET
Available in a variety of sizes According to customers' requests

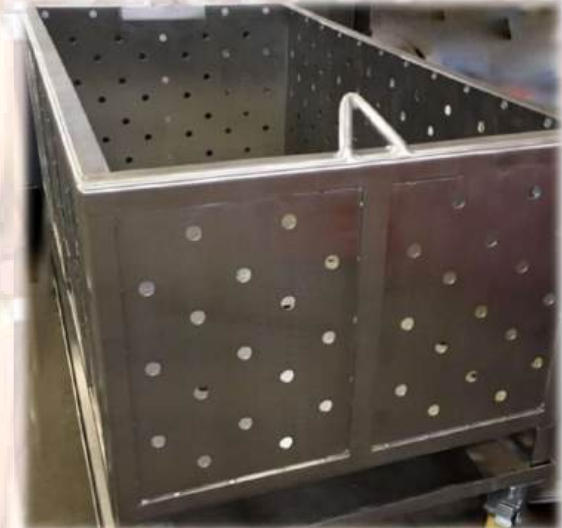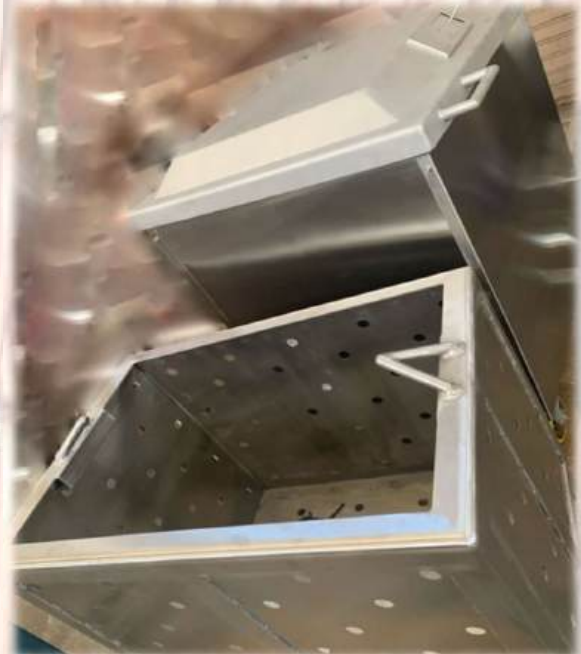



Automatic Peeler



Automatic Peeler can Peel up to 600 Vienna's a minute depending on the peel ability of the product.

- Built on a sturdy stainless-steel frame.
- Variable speed control.

Semi-Automatic Peeler



Delinkers / Russian Separator's

- Built on a sturdy stainless-steel frame with variable speed control
- Automatic Delinker can peel up to 2.5tons per hour.



Contact Information



+27 (0) 877001351

24 Hours



+27 (0) 824412963

Sales: jeannette@smokehouse.co.za Cell: 082 554 0005

Sales: roy@smokehouse.co.za Cell: 082 441 2963